RevNr.	Revision note	Date	Sign

NOTES

Magazines - Standard Tikka T3/T3x Magazines (all calibres)

Action Length - Short Action / Long Action

Designed to fit the standard Tikka T3/ T3x Inlet

May also fit some aftermarket Tikka T3/T3x magazines

Fits Left and Right Hand Rifles

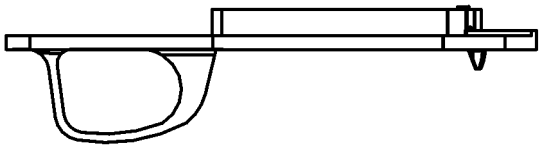

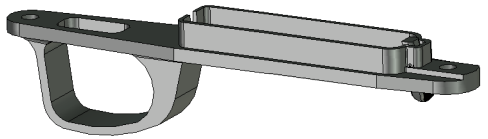

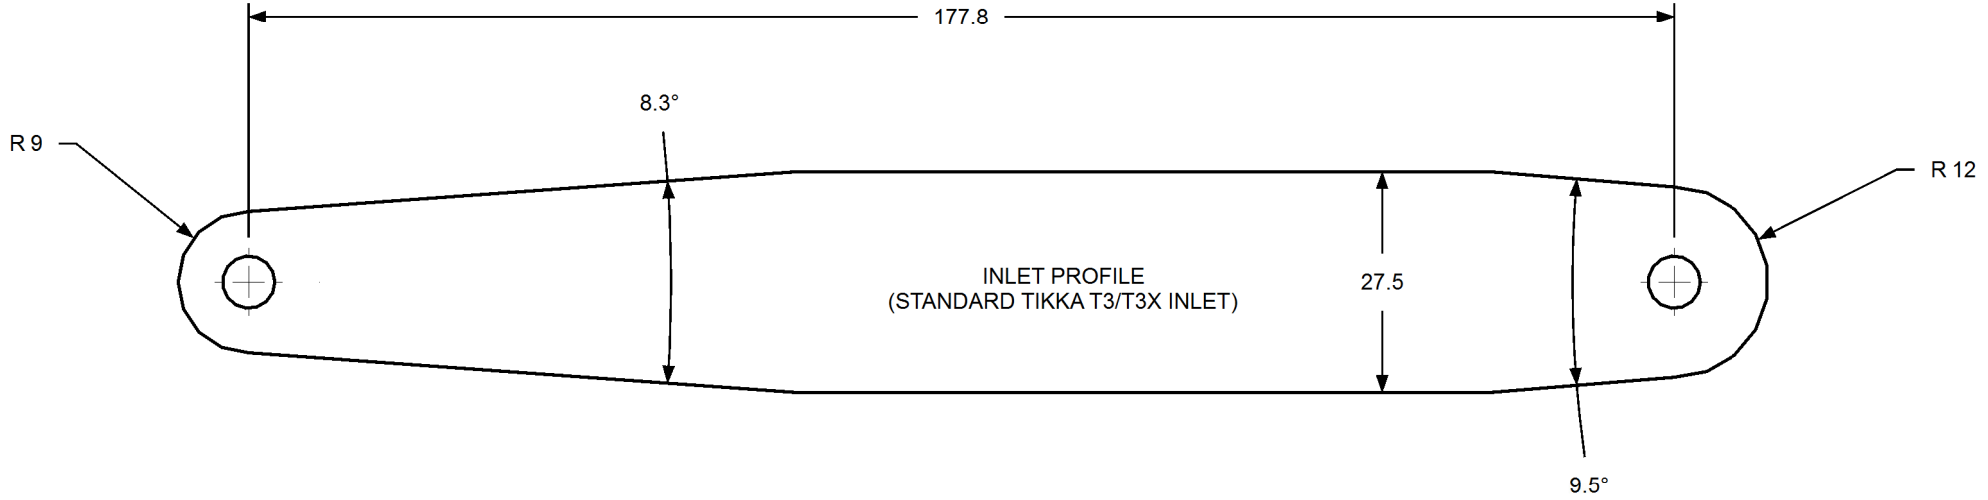

FITTING INSTRUCTIONS

1. ALWAYS UNLOAD RIFLE BEFORE COMMENCING ANY WORK.
2. REMOVE EXISTING "FACTORY TRIGGER GUARD" IF NECESSARY.
3. PLACE THE ATLASWORXS TIKKA T3/T3X ALLOY GUARD INTO THE INLET.
4. PLACE ACTION SCREWS INTO MOUNTING HOLES (ATLASWORXS TIKKA T3/T3X ACTION SCREWS RECOMMENDED AW0512-B).
5. TIGHTEN ACTION SCREWS UP TO FACTORY SPECIFICATIONS.
6. INSERT TIKKA T3/T3X MAGAZINE AND TEST FEED IS CORRECT.
7. CAN BE USED IN CONJUCTION WITH THE ATLASWORXS TIKKA T3/T3X ENHANCEMENT KIT (BEDDING PILLARS, TITANIUM LUG AND ACTION SCREWS AW0515-A)
8. FOR TROUBLE SHOOTING PLEASE REFER TO OUR WEBSITE OR CONTACT US.

NO LIABILITY IS EXPRESSED OR IMPLIED FOR DAMAGE OR INJURY WHICH MAY RESULT FROM IMPROPER INSTALLATION OR USE WITH THIS PRODUCT

ATLASWORXS
www.atlasworxs.com
Email: info@atlasworxs.com

All measurements in millimetres unless otherwise stated.

This drawing is not to be released in whole or part to any third party without the express permission of Atlasworxs

Project / Client

TIKKA T3 / T3X STANDARD TRIGGER GUARD

Title

INLET/INSTRUCTIONS FOR TIKKA T3/T3X STANDARD TRIGGER GUARD

Date	Drawn	Scale	Drawing No	Issue
20/04/2019	CB	NTS	AW0441	D