

## SP-4601C

## Scope Mount Ø34 H30mm/1.18" 6MIL PIC Gen3

Picatinny mount for use on bolt action rifles

 Rings:
 34 mm

 Tilt:
 6 MIL/20.6M0A

 Height:
 30 mm/1.18"

 Length:
 120 mm/4.72" (body)


 130 mm/5.12" (OAL)

 Weight:
 217 g/7.7 oz

 Interfaces:
 7 sets

 EAN:
 7340150701932

The IDEAL SCOPE MOUNT SYSTEM series of mounts feature seven set of interfaces to attach any of more than 40 different accessories and has a bubble level integrated in the rear plane of the mount body to prevent canting of the rifle. The rings are diagonally cut for increased visibility of the elevation and windage turrets (US Patent 8,733,011).

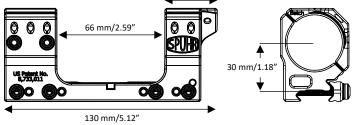

The mounts are machined from billet 7000 series aluminum and all aluminum parts are hardcoat anodized. The Torx 20 ring and clamping screws are zinc-nickel coated for corrosion resistance and come pre-waxed from the factory to ensure proper torque values.

The mount is shipped complete with a manual and a "wedge" leveling key.

## NOTE:

The SP-4601C is designed for use on rifles with MIL-STD-1913 or STANAG 4694 rails and is especially suitable for bolt action rifles with 1-piece Picatinny rails. The SP-4601C will fit most 34 mm scope tubes including scopes with extended erector housings.

CONTACT

Spuhr i Dalby ABPhone:+46 46 712 012Web:www.spuhr.com

Address:

Terminalvägen 19 SE-246 42 Löddeköpinge Sweden